



WELD&CUT / TAPING MACHINE - MX 205D SE


Machine for applying 1-side or 2-side adhesive tapes to the edge and trimming any excess of fabric. By turning off and/or removing the knife function, the machine becomes a taping machine.

MX 205D is equipped with step back function and differential wheels speed, that are settable to work separately or simultaneously. Taking advantage of this technology, the machine offers new and improved results, such as better handling of a wide range of fabrics.

MX205D SE is suitable to apply tapes with paper carrier.

HIGHLIGHTS and FEATURES

- Increasing of productivity (speed up to 20 m/min)
- Motor driven wheel with different speed
- Good performance on stretch fabrics
- Can handle tape with carrier (Paper) and without carrier
- Knife function can be switched off
- Step-back mode
- Tapes widths till 20/25 mm
- Maximum wheels load: 11 kgf
- Minimized electricity consumption
- Greater performance with less quantity of air

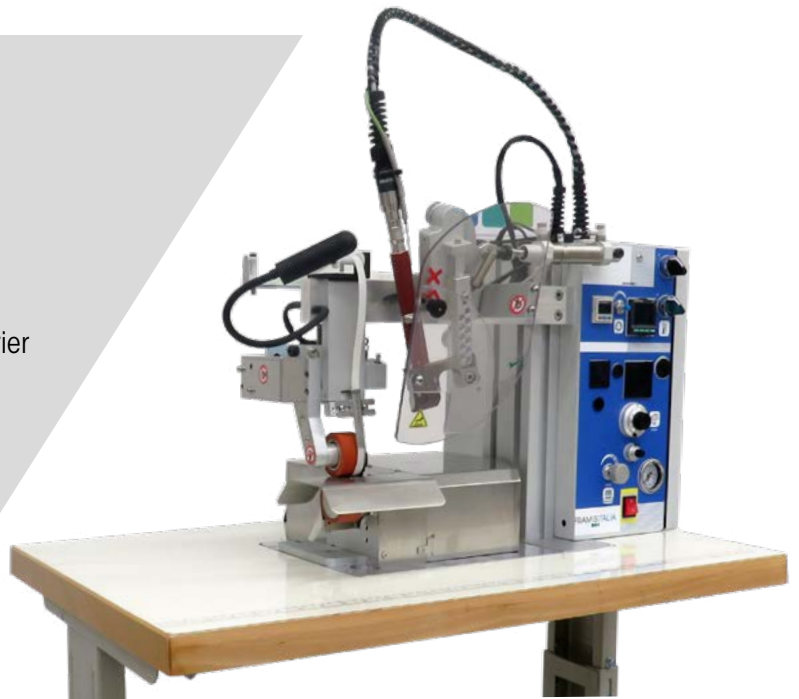

APPLICATIONS



CUT EDGE



REINFORCEMENT ULTRASONIC JOINING
DECORATIVE TAPING

TECHNOLOGY





WELD&CUT / TAPING MACHINE - MX 205D SE



HEAT HAS NEVER BEEN SO GREEN
less consumption, better efficiency

Average consumption for standard applications

Electricity consumption: 0.45 kw/h

CO₂ emission: 129 gr/h

Compressed air consumption: 45 to 55 l/min



TECHNICAL INFO FOR INSTALLATION

Dimension and weight

875 x 550 x h.11288 mm - 80 Kg

Pneumatic connection

Fast junction diam 8 mm

Maximum air flow: 80 l/min - average
consumption: 45 to 55 l/min

Input air pressure: 5.5 bar (0.55 MPa)

Air quality: dry air in accordance to DIN 8573-1
with dew point + 3° C not lubricated

Electric connection

Nominal voltage: 230 Vac

Nominal frequency: 50 Hz / 60 Hz

Nominal power requirements: 2150 W

BASE MACHINE DESCRIPTION

Base machine with 1 heater

Wheel speed with differential

Switching off Weld&Cut devise

Table support structure

Foot switches

Protection screen

Spot lamp

Roll support

Tape guide 20x1 mm

Upper silicone rubber wheel group 27 mm - 45SH

Down silicone rubber wheel 27 mm - 70SH rotary blade

30 mm nozzle

16A 3 poles plug

Specifications and appearance are subject to change without prior notice for improvement