


适配皮带机

For Belt sewing machine

两自动皮带中薄料

Twin automatic belt-driven thin material

ASU27-55/75

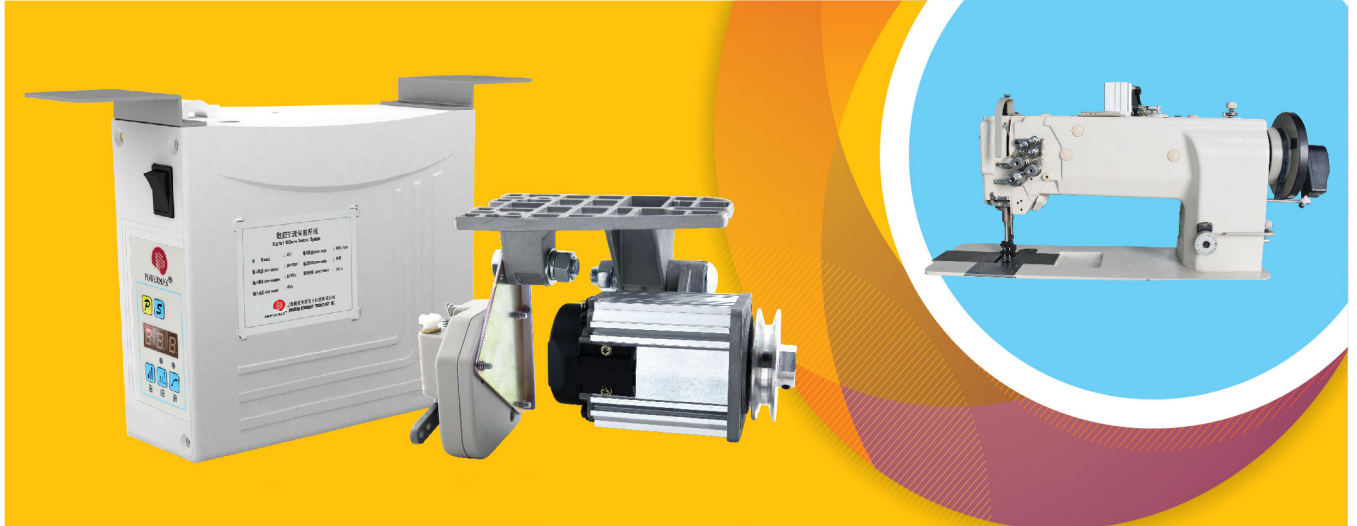

皮带同步传感器 Synchronizer

无级调速
Stepless speed
regulating





上下停针
Up and down
needle
positioning

气动吸风
Pneumatic
suction

气动抬压脚
Pneumatic
pressure
output



平面图 Ichnography

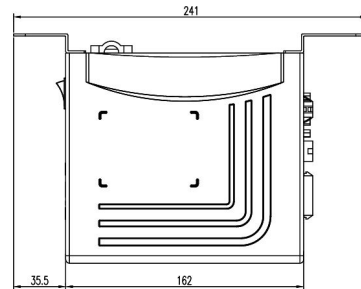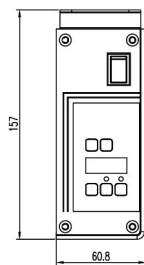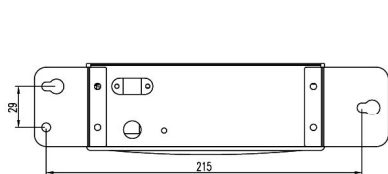

基本参数 Basic parameters

类别	Category	指标 Index
电机类型	Motor Type	550W,5000rpm/750W,3000rpm
最大扭矩	Max Torque	4.5Nm
电压范围	Power Voltage Range	单相(Single Phase): 220V±20%
无级调速	Stepless speed regulating	★
上下停针	Up and down needle positioning	★
照明灯接口	Lamp Port	★ (5V,300mA)
气动抬压脚	Pneumatic pressure output	★
气动吸风	Pneumatic suction	★
输入信号端口	Input Signal Port	2
输出信号端口	Output Signal Port	2