cuTex®

VELCRO[®] TAPE ROUND & STRAIGHT CUTTER

MODEL TBC-52RT



BY CHANGING KNIFE MOLD, YOU CAN CUT ROUND & STRAIGHT VELCRO[®] TAPE AUTOMATICALLY.


VELCRO[®] tape can be cut round or straight in a length of $5mm \sim 300meter$ long.

SPECIAL FEATURES

- High speed : It can cut 70~90 cuts per minute.(50mm long)
- Accuracy : Cut-length is accurate owing to using a stepping motor.
- Choice : By changing mold, round or straight cutting is available.
- Cutting type : Cutting is neat due to using a cold cutter like scissors and blades are durable because they are made of high-speed steel(HSS).
- Automatic operation : It works automatically only by setting length and quantity.
- Automatic stopper : It stops automatically if materials run out during operation.
- Memory : Set-length, set-q'ty & set-speed are not erased even if power off & on.




EASY TO USE & COMPACT DESIGN culex[®] MODEL TBC-52RT

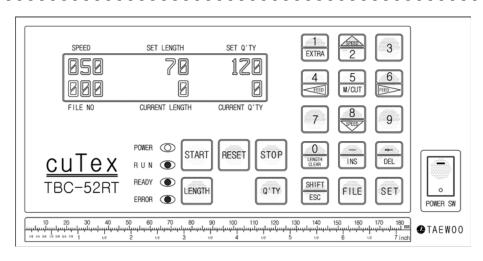

Ø OPERATION

- LENGTH button+set-length+SET button
- Q'TY button+set-q'ty+SET button
- START button → operation

* Example : Length 70mm, Q'ty 120 cuts



KEY BOARD FUNCTION

D. Oval type(single mold): 12mm~30mm E. Half-circle(single mold): 12mm~30mm 5 Manual cutting M/CUT F. Right circle(single mold): 8mm~30mm 6 4 FEED to move the roller forwards or backwards. - CUTTING LENGTH : 5mm~300meter FEED SPEED 8 see the cutting speed up or down manually. - CUTTING SPEED : 70~90cuts/min. 2 LENGTH CLEAR to make the current length zero for operation. - POWER SUPPLY : AC110/220V, 50/60Hz

- RESET to delete the current length and the current quantity. - MACHINE/N.WT : 800x320x380/22.7kg 1
- EXTRA to cut additional one.

-




ADDRESS : A-302, 1025-1 DOGOK-RI, WABU-EUP, NAMYANGJOO, KYONGGI-DO, KOREA (Postcode : 472-908) TEL +82 31 521-6904~7 FAX +82 31 521-6908 E-mail : taewoo@cutex.kr Homepage : http://www.cutex.kr



AVAILABLE MATERIALS • VELCTRO[®] tape (round or straight shape)

SPECIFICATIONS

- CUTTING KNIFE : Cold
- CUTTING WIDTH(Radius & range) :



- A. Straight cutting(flat knife) : 0~90mm
- B. Normal round(single mold): R=3, 9mm~38mm
- C. Normal round(double mold): R=3, 9mm~30mm